

# P1AT-29MF-40G2W-10

RF Attenuator, 2.92mm Male to 2.92mm Female, 10 dB, 2 W. Frequency DC to 40 GHz with a 1.25 max VSWR.

### Product Features

P1AT-29MF-40G2W-10 is a 50 Ohm RF fixed value attenuator, frequency DC to 40 GHz.

2.92mm male to 2.92mm female connectors. Attenuation 10 dB.

Power handling is 2 Watts. Max VSWR is 1.25.

Attenuator body is passivated stainless steel.



### Electrical Specification: T<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40.0	



### Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 2	2.92mm Female	
RoHS Compliance	Yes	

### Drawing

# P1AT-29MF-40G2W-10

RF Attenuator, 2.92mm Male to 2.92mm Female, 10 dB, 2 W. Frequency DC to 40 GHz with a 1.25 max VSWR.

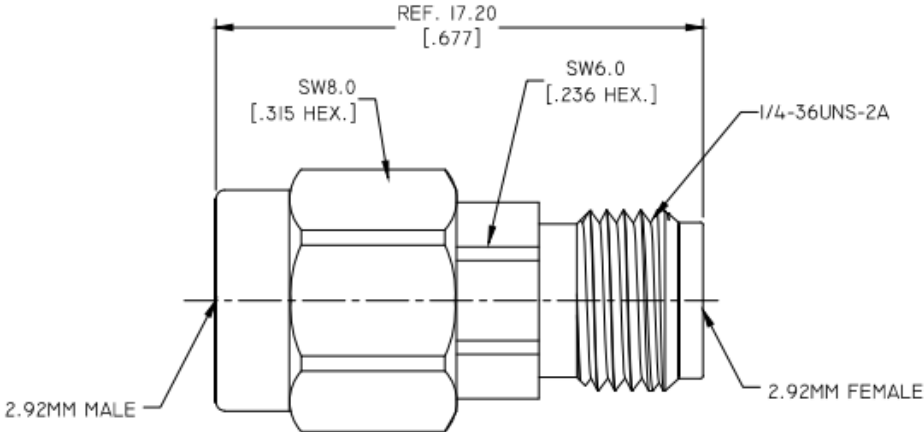

## Product Notes