


Product Features

P1-MMCXP/SMAPRA-RG316-36 is an SMA Male Right Angle to MMCX Plug straight, RG-316 flexible coax assembly, 36 inches long, and Operating to 6 GHz.

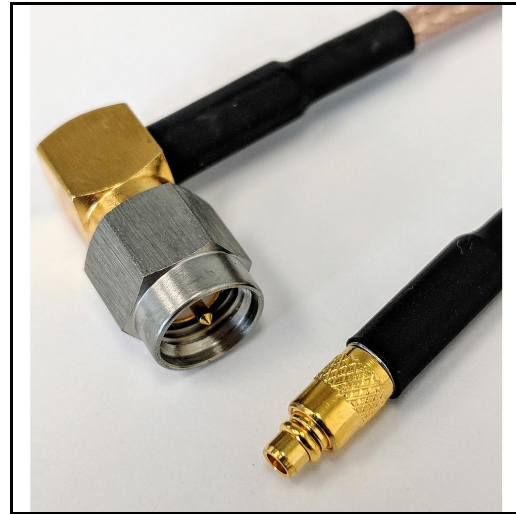

Electrical Specification: T_{Ambient} = 25° C

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-------------------------|-----------------|--------|-----|---------|------|-------|
| Frequency Range | | GHz | DC | | 6.0 | |
| VSWR | DC to 0.4 | 1: | | | 1.2 | |
| | 0.4 to 1.0 | | | | 1.25 | |
| | 1.0 to 2.4 | | | | 1.3 | |
| | 2.4 to 5.0 | | | | 1.35 | |
| Insertion Loss | DC to 0.4 | dB/ft. | | | 0.18 | |
| | 0.4 to 1.0 | | | | 0.31 | |
| | 1.0 to 2.4 | | | | 0.49 | |
| | 2.4 to 5.0 | | | | 0.67 | |
| Velocity Of Propagation | | % | | 69.5 | | |

Mechanical And Environmental Specifications:

| Parameter | Description | Notes |
|--------------------------|----------------------|-------|
| Connector 1 | SMA Male Right Angle | |
| Connector 1 Coupling Nut | Gold Plated Brass | |
| Connector 1 Body | Gold Plated Brass | |
| Connector 1 Contact | Gold Plated Brass | |
| Connector 2 | MMCX Plug | |
| Connector 2 Coupling Nut | None | |
| Connector 2 Body | Gold Plated Brass | |
| Connector 2 Contact | Gold Plated Brass | |
| Coax Cable | RG Type Flex | |
| Cable Type | RG-316 | |
| Cable Inner Conductor | 7/.0067 SPCW | |
| Dielectric | PTFE | |
| Shield | 1. SPC Braid | |
| Jacket | FEP | |
| Coax Diameter | 0.098 | |
| Minimum Bend Radius | 0.5 | |
| Length | 36.0 | |

P1-MMCXP/SMAPRA-RG316-36

SMA Male Right Angle to MMCX Plug , RG-316 RG Type Flex Coax, 36 inches long, and
Operating to 6 GHz.

| Parameter | Description | Notes |
|-----------------------|-------------------|-------|
| Operating Temperature | -55.0 to 200.0 °C | |
| RoHS Compliance | Yes | |

Product Notes