


# P1-SMAP/SMAP-085CC-26

SMA Male to SMA Male cable assembly using 085CC Conformable Coax, 26 inches long, Operating to 18 GHz.

#### **Product Features**

P1-SMAP/SMAP-085CC-26 is an RF Cable that is part of P1dB's YouForm™ conformable cable assembly series. It is a 26 inch SMA Male to SMA Male Conformable cable assembly that utilizes 085CC conformable coax with a diameter of 0.085 inches. The RF cable assembly operates to 18 GHz with a max VSWR of 1.35:1. YouForm™ cables are conformable and jacketed conformable versions 085 and 141 semi-rigid coax cables and meet RG402 and RG405 dimensional and electrical specifications. YouForm™ cable assemblies can operate up to 18 GHz, depending on the configuration. The advantage of YouForm™ conformable cables over semi-rigid are their ability to be formed by hand multiple times, while semi-rigid cables can be formed only once with special bending tools.



## **Electrical Specification: T**<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		18.0	
VSWR	DC to 1.0	1:			1.25	
	1.0 to 5.0				1.3	
	5.0 to 10.0				1.32	
	10.0 to 18.0				1.35	
Insertion Loss	DC to 1.0	dB/ft.			0.22	
	1.0 to 5.0				0.49	
	5.0 to 10.0				0.83	
	10.0 to 18.0				1.18	
Velocity Of Propagation		%		70.0		

#### **Mechanical And Environmental Specifications:**

Parameter	Description	Notes		
Connector 1	SMA Male			
Connector 1 Coupling Nut	Passivated Stainless Steel			
Connector 1 Body	Gold Plated Brass			
Connector 1 Contact	Gold Plated Brass			
Connector 2	SMA Male			
Connector 2 Coupling Nut	Passivated Stainless Steel			
Connector 2 Body	Gold Plated Brass			
Connector 2 Contact	Gold Plated Brass			
Coax Cable	Conformable			
Cable Type	085CC			
Cable Inner Conductor	SPCW			
Dielectric	PTFE			
Shield	1. Tinned Cu/Sn Braid			
Jacket	FEP			
Coax Diameter	0.085			

P1dB, Inc.

188 Martinvale Lane, San Jose, CA 95119

+1(408)613-4857




# P1-SMAP/SMAP-085CC-26

SMA Male to SMA Male cable assembly using 085CC Conformable Coax, 26 inches long, Operating to 18 GHz.

Parameter	Description	Notes
Minimum Bend Radius	0.38	
Length	26.0	
Operating Temprature	-85.0 to 200.0 °C	
RoHS Compliance	Yes	

# **Drawing**

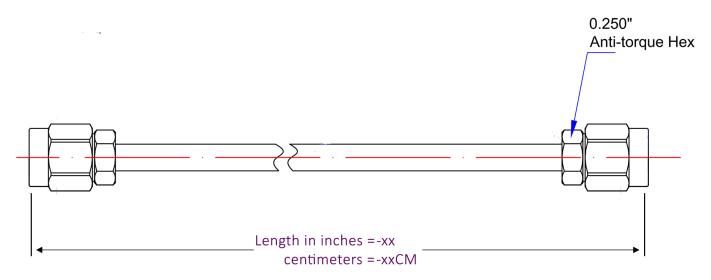

## **Product Notes**