

**Product Features**

P1AD-24M35F is a 50 Ohm RF adapter, 2.4mm male to 3.5mm female, operating to 35 GHz.

Maximum VSWR is 1.25.

Material is passivated stainless steel.




**Electrical Specification: T<sub>Ambient</sub> = 25° C**

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Impedance				50.0		

**Mechanical And Environmental Specifications:**

Parameter	Description	Notes
Connector 1	2.4mm Male	
Connector 2	3.5mm Female	
Orientation	Straight	
Mount Type	None	
RoHS Compliance	Yes	

**Drawing**

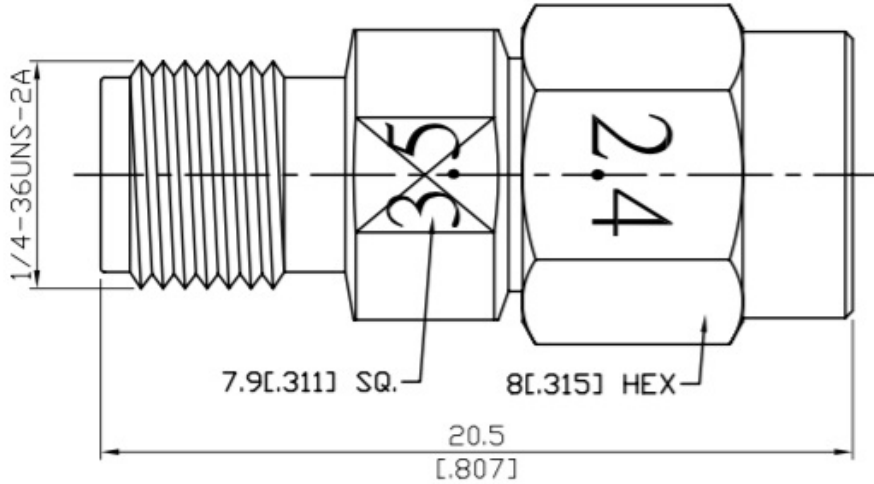

**Graph**

Parts	Material	Plating ( Micro-inch )
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

**Product Notes**