# P1AD-29MF

RF Adapter, 2.92mm Male to 2.92mm Female, VSWR 1.25 max DC to 40 GHz.

**Product Features**

P1dB's P1AD-29MF is a straight 2.92mm Male to 2.92mm Female adapter that operates to 40 GHz with a maximum VSWR of 1.25:1.
Material is passivated stainless steel.



**Electrical Specification: $T_{Ambient}$ = 25° C**

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|---|---|---|---|---|---|---|
| Impedance | | | | 50.0 | | |

**Mechanical And Environmental Specifications:**

| Parameter | Description | Notes |
|---|---|---|
| Connector 1 | 2.92mm Male | |
| Connector 2 | 2.92mm Female | |
| Orientation | Straight | |
| Mount Type | None | |
| RoHS Compliance | Yes | |


**Drawing**

**P1dB, Inc.** 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

# P1AD-29MF

RF Adapter, 2.92mm Male to 2.92mm Female, VSWR 1.25 max DC to 40 GHz.

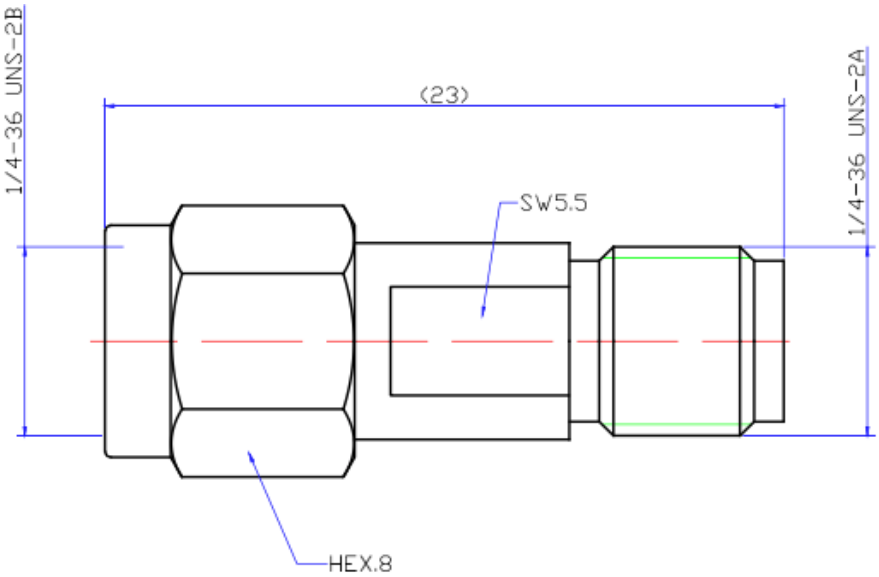


**Product Notes**

-40 to +85 deg C operating temp range.

**P1dB, Inc.** 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com