P1AD-SAFM-27

RF Adapter, SMA female (jack) to SMA male (plug) , up to 27 GHz. VSWR 1.15 maximum.



Product Features

P1AD-SAFM-27 is a 50 Ohm RF Adapter, SMA female (jack) to SMA male (plug). This SMA in-series adapter operates to 27 GHz with a maximum VSWR of 1.15. It has a passivated stainless steel body and Insertion Loss up to 27 GHz is <0.15 dB. Compare to SM4983.
P1dB offers a large selection of standard and precision RF adapters in both 50 Ohm and 75 Ohm designs for lab, aerospace, industrial and commercial applications.

Electrical Specification: $T_{Ambient}$ = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Impedance				50.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Female	
Connector 2	SMA Male	
Orientation	Straight	
RoHS Compliance	Yes	


Drawing

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

P1AD-SAFM-27

RF Adapter, SMA female (jack) to SMA male (plug) , up to 27 GHz. VSWR 1.15 maximum.

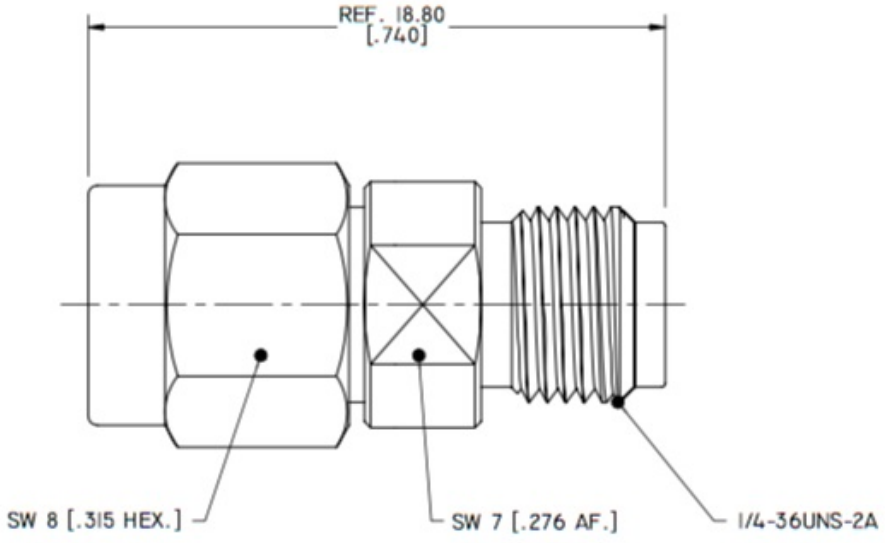

Product Notes

temp range: -55 to +125 deg C

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com