

Product Features

P1AD-SAFMMXP is a 50 Ohm RF adapter, SMA female to MMCX plug (male). Operating to 6 GHz with a max VSWR of 1.30. Adapter body is gold plated brass.




Electrical Specification: T_{Ambient} = 25° C

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------------|-----------------|-------|-----|---------|-----|-------|
| Frequency Range | | GHz | DC | | 6.0 | |

Mechanical And Environmental Specifications:

| Parameter | Description | Notes |
|-----------------------|------------------------------|-------|
| Connector 1 | SMA Female | |
| Connector 1 Body | Gold Plated Brass | |
| Connector 1 Contact | Gold Plated Beryllium Copper | |
| Connector 2 | MMCX Plug | |
| Operating Temperature | -40.0 to 85.0 °C | |
| RoHS Compliance | Yes | |

Drawing

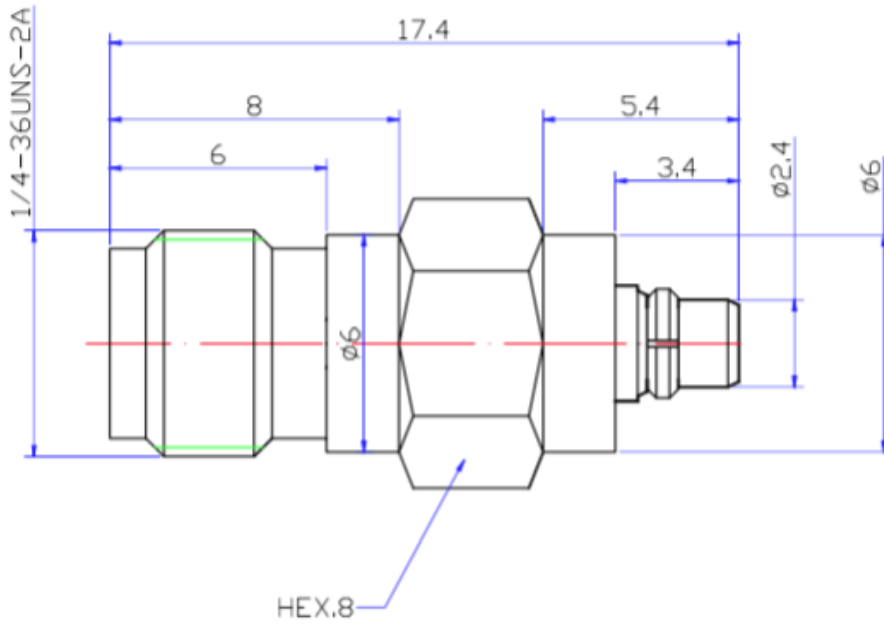

Product Notes