P1AD-SAFSBP

RF Adapter, SMA Female to SMB Plug with female center contact, DC to 3 GHz

Product Features

P1dB's P1AD-SAFSBP is an RF between series adapter,
SMA Female to SMB Male with female center contact.
The P1AD-SAFSBP adapter is 50 ohm impedance,
operates DC to 3 GHz with a maximum VSWR of 1.2:1.
P1dB's P1AD-SAFSBP adapter is brass body construction with gold plating
Insertion Loss is 0.4 dB max to 3 GHz.




Electrical Specification: $T_{Ambient}$ = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		3.0	
Impedance				50.0		


Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Female	
Connector 2	Connector 2: SMB Plug (female center contact)	
RoHS Compliance	Yes	

Drawing

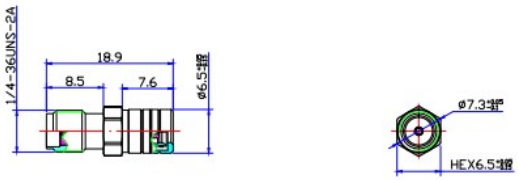

Graph



Product Notes

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com