P1AD-SAMMMXP

Adapter, SMA male to MMCX plug (male) Gold plated brass body, VSWR 1.3 max to 6 GHz.

Product Features

P1AD-SAFMXP is a 50 Ohm RF adapter, SMA male to MCX plug (male). Operating to 6 GHz with a max VSWR of 1.30. Adapter body is gold plated brass.




Electrical Specification: $T_{Ambient}$ = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		6.0	

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Male	
Connector 1 Body	Gold Plated Brass	
Connector 1 Contact	Gold Plated Beryllium Copper	
Connector 2	MMCX Plug	
Operating Temprature	-40.0 to 85.0 °C	
RoHS Compliance	Yes	

Drawing

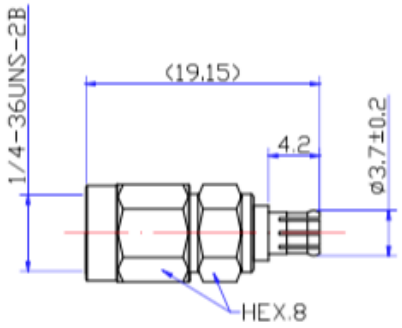

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

P1AD-SAMMMXP

Adapter, SMA male to MMCX plug (male) Gold plated brass body, VSWR 1.3 max to 6 GHz.

Product Notes

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com