

P1AT-24MF-50G2W-6

RF Attenuator, 2.4mm Male to 2.4mm Female, 50 GHz, 6 dB, 2 Watt. VSWR 1.30 max
DC to 50 GHz.

Product Features

P1AT-24MF-50G2W-06 is a 50 Ohm RF attenuator, 2.4mm male to 2.4mm female. Frequency is DC to 50 GHz with a 1.30 max VSWR.

The attenuation value is 6 dB fixed and power rating is 2 Watts max.

Body material is passivated stainless steel.



Electrical Specification: $T_{\text{Ambient}} = 25^{\circ}\text{C}$

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		50.0	


Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.4mm Male	
Connector 2	2.4mm Female	
RoHS Compliance	Yes	

Graph

P1AT-24MF-50G2W-6

RF Attenuator, 2.4mm Male to 2.4mm Female, 50 GHz, 6 dB, 2 Watt. VSWR 1.30 max
DC to 50 GHz.

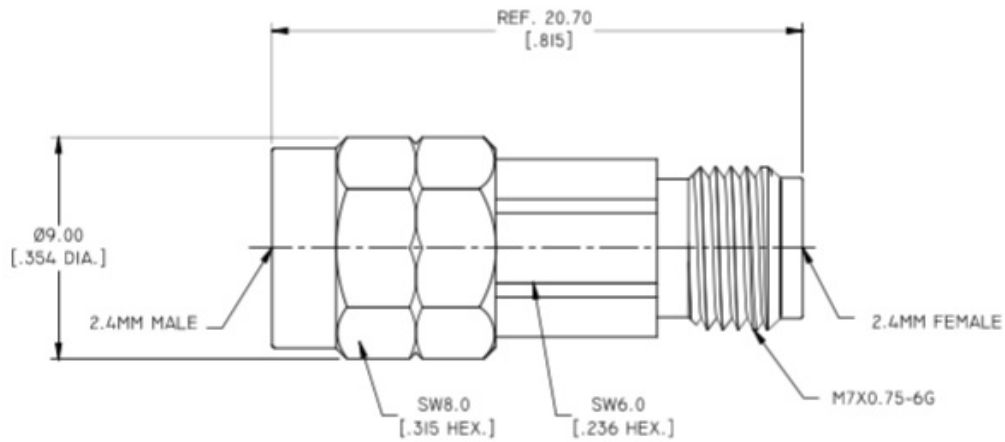

Product Notes

Temp range -55 to +125 C.