P1AT-24MF-50G2W-6

RF Attenuator, 2.4mm Male to 2.4mm Female, 50 GHz, 6 dB, 2 Watt. VSWR 1.30 max DC to 50 GHz.



Product Features

P1AT-24MF-50G2W-06 is a 50 Ohm RF attenuator, 2.4mm male to 2.4mm female. Frequency is DC to 50 GHz with a 1.30 max VSWR.

The attenuation value is 6 dB fixed and power rating is 2 Watts max.

Body material is passivated stainless steel.

Electrical Specification: $T_{Ambient}$ = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		50.0	

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.4mm Male	
Connector 2	2.4mm Female	
RoHS Compliance	Yes	


Graph

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

P1AT-24MF-50G2W-6

RF Attenuator, 2.4mm Male to 2.4mm Female, 50 GHz, 6 dB, 2 Watt. VSWR 1.30 max
DC to 50 GHz.

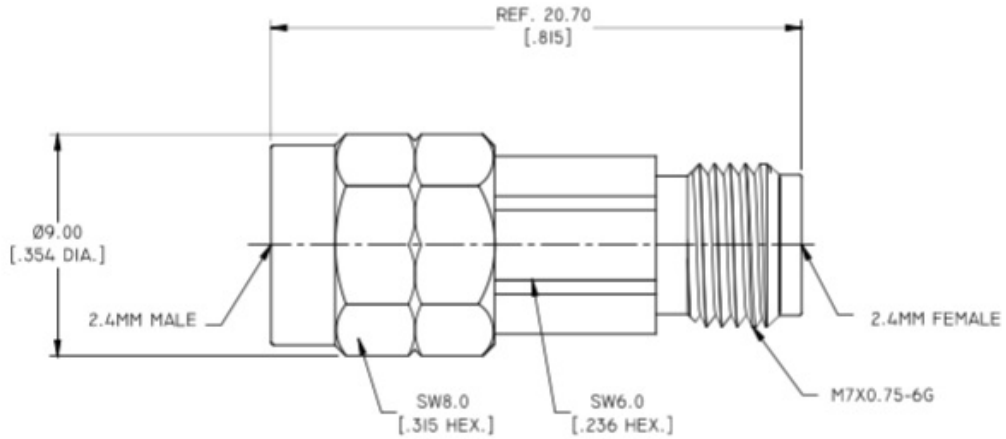

Product Notes

Temp range -55 to +125 C.

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com