P1CA-10M10M-F047-24

Flexible cable assembly, 1.0mm male to 1.0mm male, F047 cable, 24 inch. Frequency DC to 110 GHz. VSWR 1.45 max.

Product Features

P1CA-10M10M-F047-24 is a 50 Ohm flexible RF cable assembly, 1.0mm male to 1.0mm male. The cable is F047 with an outer diameter of 0.057 inch (1.45mm). Assembly length is 24 inch, measured connector end-to-end. Frequency is DC to 110 GHz with a max VSWR of 1.45.



Electrical Specification: $T_{Ambient}$ = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		110 GHz	

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	1.0mm male	
Connector 2	1.0mm male	
Length	24.0	
RoHS Compliance	Yes	

Drawing




Graph

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

P1CA-10M10M-F047-24

Flexible cable assembly, 1.0mm male to 1.0mm male, F047 cable, 24 inch. Frequency DC to 110 GHz. VSWR 1.45 max.

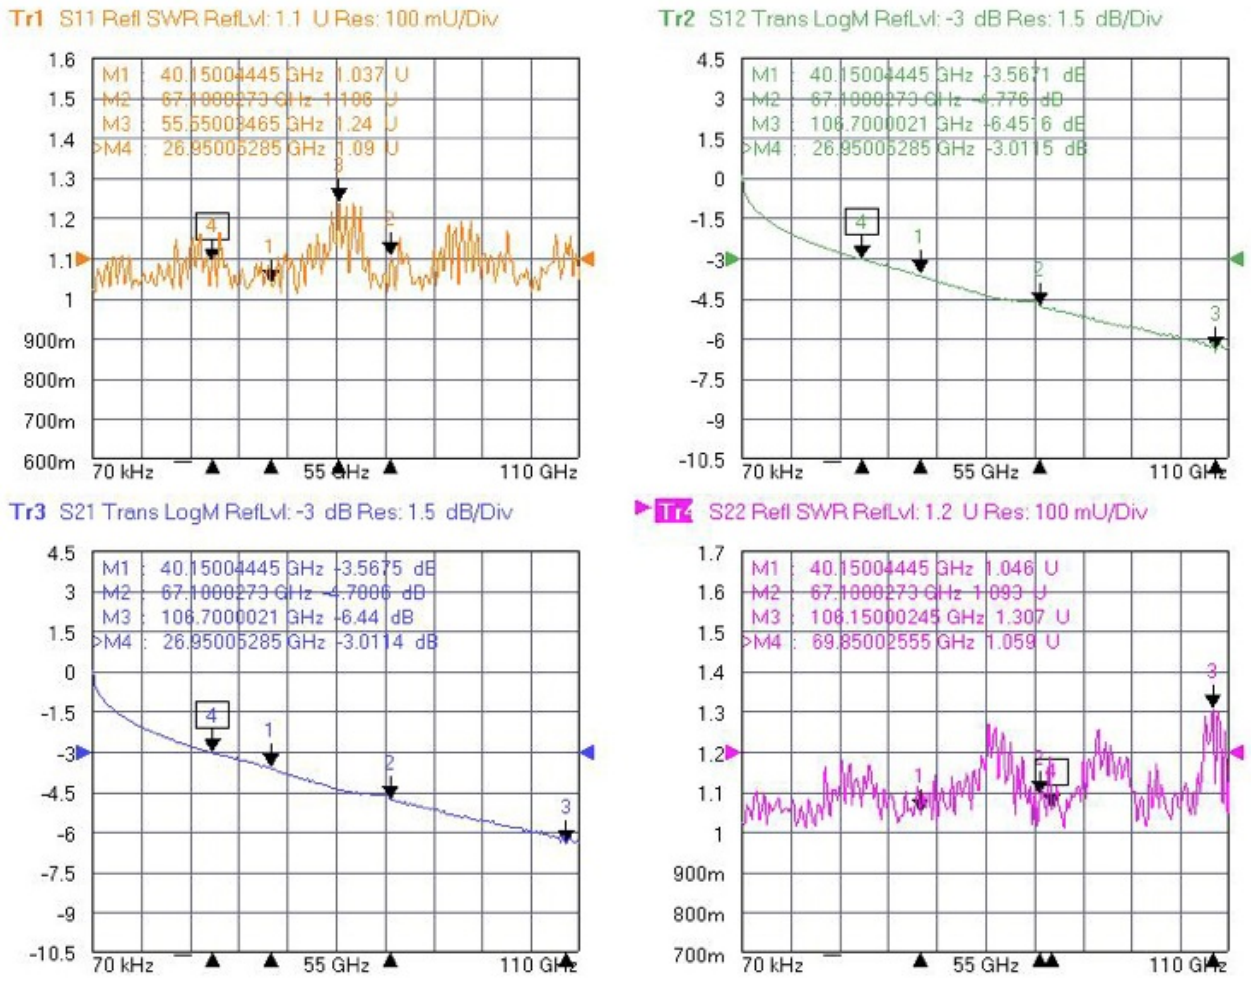

Product Notes

Temp range is -55 to +125 deg C.

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com