

# P1CA-24NMDF29M-400PT-24

Precision test cable, 2.4mm NMD female to 2.92mm male, 400PT Phase-Flex stable cable, 24 inch. Frequency DC to 40 GHz.

## Product Features

P1dB's P1CA-24NMDF29M-400PT-24 is a 50 Ohm precision test cable operating to 40 GHz. This high performance test cable provides excellent phase and amplitude stability during flexure. 2.4mm NMD female to 2.92mm male connectors. Typical VSWR up to 40 GHz is 1.25 (1.35 maximum).

Phase stability vs flexure (degrees) for this 24 inch assembly is +/- 3.25 typical (4.95 maximum). Amplitude stability vs flexure (dB) is +/-0.04 typical (0.08 maximum). Velocity of propagation is 74 %. The cable outer diameter is 0.400 inch (10.4mm) and features a braided jacket over extra braided strength and crush resistance layers.



Attenuation for the 400PT cable is 1.6 dB/meter (0.49dB/ft) at 18 GHz and 2.46 dB/m (0.76dB/ft) at 40 GHz.

## Electrical Specification: $T_{\text{Ambient}} = 25^{\circ}\text{C}$

| Parameter       | Frequency Range | Units | Min | Typical | Max  | Notes |
|-----------------|-----------------|-------|-----|---------|------|-------|
| Frequency Range |                 | GHz   | DC  |         | 40.0 |       |

## Mechanical And Environmental Specifications:

| Parameter       | Description                  | Notes |
|-----------------|------------------------------|-------|
| Connector 1     | 2.4mm NMD Female             |       |
| Connector 2     | 2.92mm Male                  |       |
| Coax Cable      | Phase-Flex stable test cable |       |
| Cable Type      | 400PT                        |       |
| Coax Diameter   | 0.400                        |       |
| Length          | 24.0                         |       |
| RoHS Compliance | Yes                          |       |

## Drawing

P1dB, Inc.


188 Martinvale Lane, San Jose, CA 95119

+1(408)613-4857

sales@p1dB.com

# P1CA-24NMDF29M-400PT-24

Precision test cable, 2.4mm NMD female to 2.92mm male, 400PT Phase-Flex stable cable, 24 inch. Frequency DC to 40 GHz.

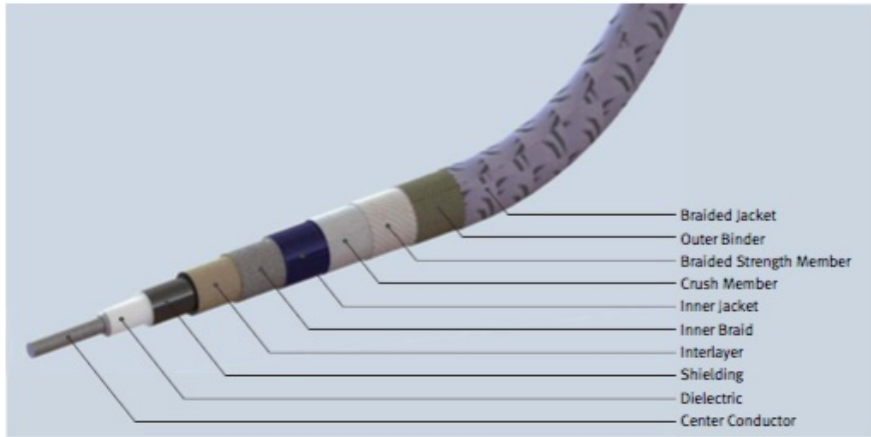

## Product Notes

Crush resistance >200 IB (100kg)

Flexure life cycles > 20,000

Mating cycles >5,000

Min bend radius 1.25 inch (32 mm)

Operating temp: -55 to +125 deg C

Comparable performance to Gore Phase-Flex & Florida RF Labs ASR-F precision test cables.