


# P1CA-29FPT-020SR-2

2.92mm Female to Pigtail (no connector) cable assembly using 020SR Semi-Rigid Coax, 2 inch. RF tested over frequency DC to 40 GHz. Max VSWR 1.45.

## Product Features

P1CA-29FPT-020SR-2 is a high frequency RF Test Probe (Pigtail assembly). The cable assembly is 2.92mm female connector to Pigtail (no connector) using 020SR Semi-Rigid Coax (.020 inch diameter) , 2 inch long.

Each assembly is RF tested DC to 40 GHz. Max VSWR 1.45.

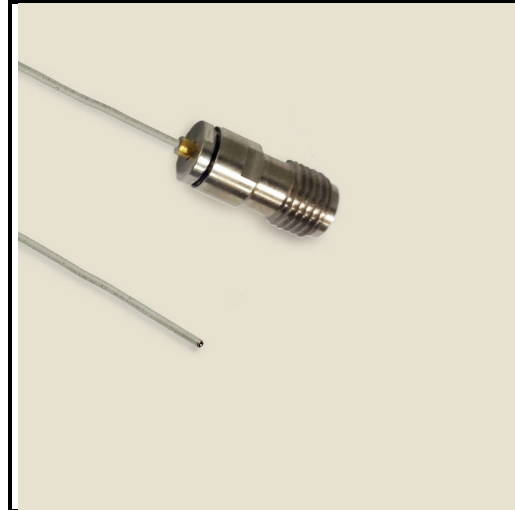


Electrical Specification:  $T_{\text{Ambient}} = 25^{\circ}\text{C}$

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40	

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.92mm Female	
Connector 2	Pigtail - No Connector	
Coax Cable	Semi-Rigid	
Cable Type	020SR	
Coax Diameter	0.02	
Length	2.0	
RoHS Compliance	Yes	

## Drawing

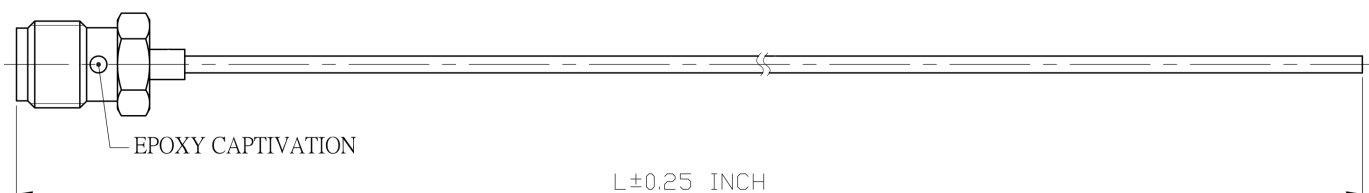

## **P1CA-29FPT-020SR-2**

2.92mm Female to Pigtail (no connector) cable assembly using 020SR Semi-Rigid Coax, 2 inch. RF tested over frequency DC to 40 GHz. Max VSWR 1.45.

---

### **Product Notes**