

P1CA-29M29M-400PT-1M

Precision test cable, 2.92mm Male to 2.92mm Male, 400PT Phase-Flex stable cable, 1 meter, operating to 40 GHz. Typical lead time is 4 weeks.

Product Features

P1dB's P1CA-29M29M-400PT-1M is a 50 Ohm precision test cable operating to 40 GHz. This high performance test cable provides excellent phase and amplitude stability during flexure. With 2.92mm stainless steel connectors, the assembly is 1 meter long and operates to 40 GHz. Typcial VSWR up to 40 GHz is 1.25 (1.35 maximum). Typical insertion loss to 40 GHz for this 1 meter assembly is 3.6 dB.

Phase stability vs flexure (degrees) for the 1 meter assembly is +/- 4.95 typical (7.90 maximum).

Amplitude stability vs flexure (dB) for a 1 meter assembly is +/- 0.06 typical (0.15 maximum).

Velocity of propagation is 74 %.

The cable outer diameter is 0.400 inch (10.4mm) and features a braided jacket over extra braided strength and crush resistance layers.



Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40.0	

Mechanical And Environmental Specifications:


Parameter	Description	Notes	
Connector 1	2.92mm Male		
Connector 2	2.92mm Male		
Coax Cable	Phase-Flex stable test cable		
Cable Type	400PT		
Coax Diameter	0.400		
RoHS Compliance	Yes		

Drawing




P1CA-29M29M-400PT-1M

Precision test cable, 2.92mm Male to 2.92mm Male, 400PT Phase-Flex stable cable, 1 meter, operating to 40 GHz. Typical lead time is 4 weeks.

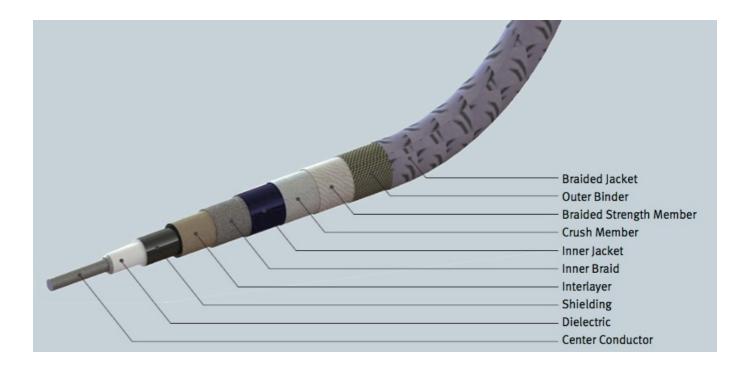

Graph

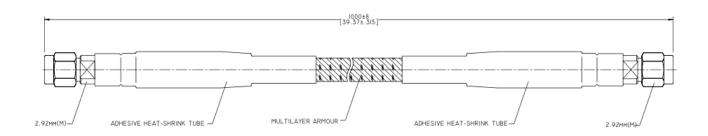

MATERIAL & FINISH:

- CONNECTOR BODY: STAINLESS STEEL, PASSIVATED CONNECTOR CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 OUTER JACKET: MULTILAYER ARMOUR

ELECTRICAL DATA:

- IMPEDANCE: 50 OHMS

- FREQUENCY RANGE: DC-40 GHz

 VSWR: 1.25 TYP. /I.35 MAX.

 INSERTION LOSS: 3.7 DB TYP.

 PHASE STABILITY: ± 4.95° TYP./± 7.90° MAX.

 AMPLITUDE STABILITY: ± 0.06 DB TYP./± 0.15 DB MAX.

MECHANICAL DATA:

- MAXIMUM OUTER DIAMETER: 10.4 MM
- 2 MINIMUM STATIC BEND RADIUS: 32 MM 3 MATING CYCLES: >5000
- 4 RECOMMENDED TORQUE: 0.9 NM.

- ENVIRONMENTAL DATA:

 I OPERATING TEMPERATURE: -55 °C~+125 °C

 2 STORAGE TEMPERATURE: -65 °C~+165 °C

 3 A0;2011/65/EU(Rohs) AND 2015/863/(Rohs): COMPLIANT
 - 4 1999/45/EC(REACH): COMPLIANT 5 CRUSH RESISTANCE: > 100 KG

Product Notes P1dB, Inc.



P1CA-29M29M-400PT-1M

Precision test cable, 2.92mm Male to 2.92mm Male, 400PT Phase-Flex stable cable, 1 meter, operating to 40 GHz. Typical lead time is 4 weeks.

Crush resistance >200 IB (100kg)

Flexure life cycles > 20,000