

## Product Features

P1dB's P1CA-29M29M-400PT-72 is a 50 Ohm precision test cable operating to 40 GHz. This high performance test cable provides excellent phase and amplitude stability during flexure. With 2.92mm stainless steel connectors, the assembly is 72 inch long and operates to 40 GHz.

Typical VSWR up to 40 GHz is 1.25 (1.35 maximum). Typical insertion loss to 40 GHz for this 72 inch assembly is 6.8 dB. Phase stability vs flexure (degrees) is +/- 4.95 typical (7.90 maximum). Amplitude stability vs flexure (dB) is +/-0.06 typical (0.15 maximum). Velocity of propagation is 74 %. The cable outer diameter is 0.400 inch (10.4mm) and features a braided jacket over extra braided strength and crush resistance layers.



## Electrical Specification: T<sub>Ambient</sub> = 25° C


Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		40.0	

## Mechanical And Environmental Specifications:


Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 2	2.92mm Male	
Coax Cable	Phase-Flex stable test cable	
Cable Type	400PT	
Coax Diameter	0.400	
Length	72.0	
RoHS Compliance	Yes	

## Drawing

Precision test cable, 2.92mm Male to 2.92mm Male, 400PT Phase-Flex stable cable, 72 inch, operating to 40 GHz. Typical lead time is 4 weeks.

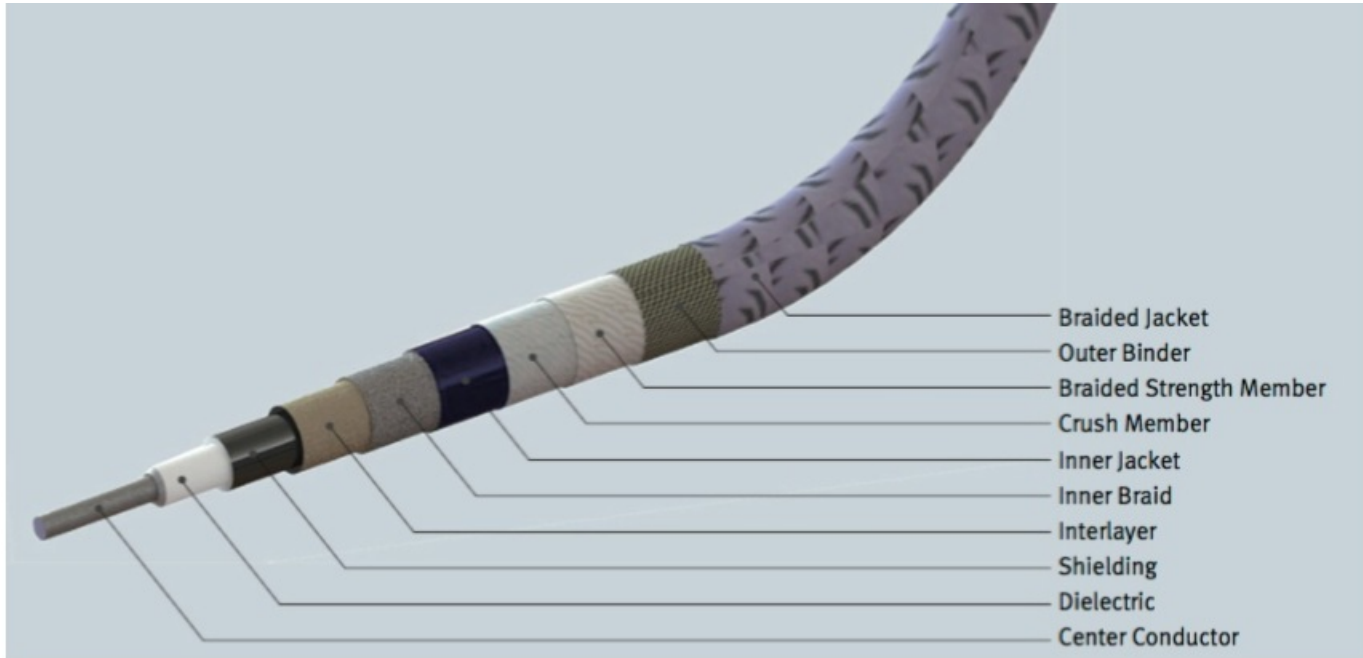

**Graph**

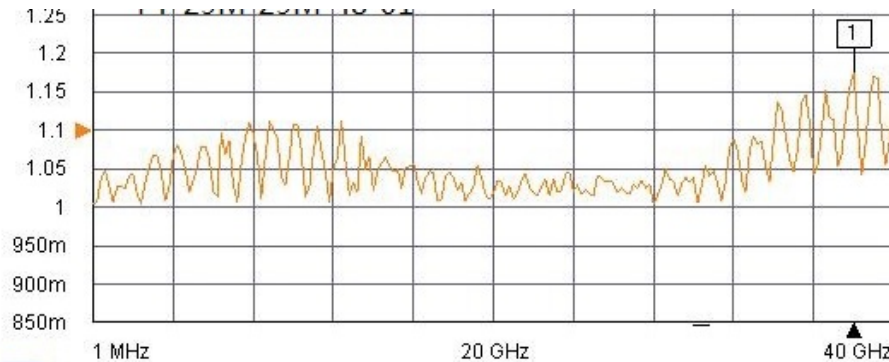

- ENVIRONMENTAL DATA:
- 1 OPERATING TEMPERATURE: -55°C~+125°C
  - 2 STORAGE TEMPERATURE: -65°C~+165°C
  - 3 A0:2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
  - 4 1999/45/EC(REACH): COMPLIANT
  - 5 CRUSH RESISTANCE: > 100 KG

**Product Notes**

Crush resistance >200 LB (100kg)

Flexure life cycles > 20,000

Mating cycles>5,000

Precision test cable, 2.92mm Male to 2.92mm Male, 400PT Phase-Flex stable cable, 72 inch, operating to 40 GHz. Typical lead time is 4 weeks.

---

Min bend radius 1.25 inch (32 mm)