


P1CA-29M29M-SS085-12-PM-SET16

Phase matched cable assemblies, 2.92mm male to 2.92mm male connectors. Length 12 inch. Phase matched within +/- 5 degrees DC to 20 GHz. Supplied as a set of 16 matched cables. Price is per cable.

Product Features

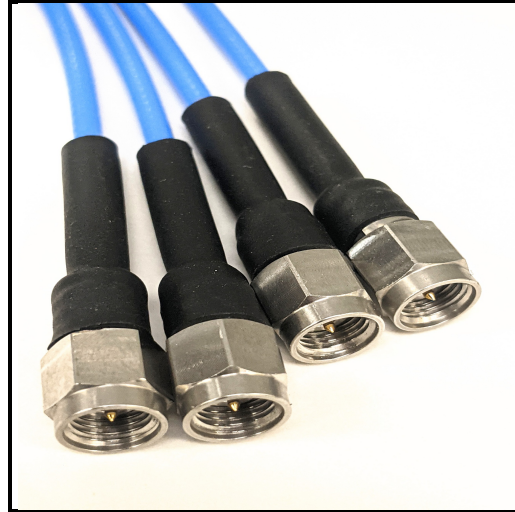

Electrical Specification: $T_{\text{Ambient}} = 25^{\circ}\text{C}$

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		20.0	
Velocity Of Propagation		%		70.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	2.92mm Male	
Connector 1 Coupling Nut	Passivated Stainless Steel	
Connector 1 Body	Passivated Stainless Steel	
Connector 1 Contact	Gold Plated Brass	
Connector 2	2.92mm Male	
Connector 2 Coupling Nut	Passivated Stainless Steel	
Connector 2 Body	Passivated Stainless Steel	
Connector 2 Contact	Gold Plated Beryllium Copper	
Length	12.0	
Operating Temperature	-55.0 to 125.0 °C	
RoHS Compliance	Yes	

Product Notes

P1dB, Inc.

188 Martinvale Lane, San Jose, CA 95119

+1(408)613-4857

sales@p1dB.com

P1CA-29M29M-SS085-12-PM-SET16

Phase matched cable assemblies, 2.92mm male to 2.92mm male connectors. Length 12 inch. Phase matched within +/- 5 degrees DC to 20 GHz. Supplied as a set of 16 matched cables. Price is per cable.
