


**Product Features**

P1CA-SAFPT-085CJ-5 is an RF Test Probe that is part of P1dB's semi-rigid, conformable, jacketed conformable and flexible Pigtail assembly series. It is a 5 inch SMA Female to a Pigtail Jacketed Conformable cable assembly that utilizes 085CJ conformable coax with a diameter of 0.102 inches. The Pigtail cable assembly operates to 6 GHz and is a popular solution for in-circuit RF probe testing.

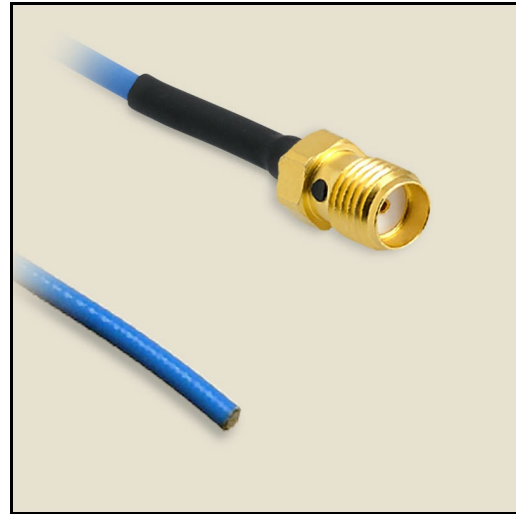

**Electrical Specification: T<sub>Ambient</sub> = 25° C**

| Parameter               | Frequency Range | Units  | Min | Typical | Max  | Notes |
|-------------------------|-----------------|--------|-----|---------|------|-------|
| Frequency Range         |                 | GHz    | DC  |         | 6.0  |       |
| Insertion Loss          | DC to 1.0       | dB/ft. |     |         | 0.22 |       |
|                         | 1.0 to 3.0      |        |     |         | 0.49 |       |
|                         | 3.0 to 5.0      |        |     |         | 0.83 |       |
| Velocity Of Propagation |                 | %      |     | 70.0    |      |       |

**Mechanical And Environmental Specifications:**

| Parameter                | Description                  | Notes |
|--------------------------|------------------------------|-------|
| Connector 1              | SMA Female                   |       |
| Connector 1 Coupling Nut | None                         |       |
| Connector 1 Body         | Gold Plated Brass            |       |
| Connector 1 Contact      | Gold Plated Beryllium Copper |       |
| Connector 2              | Pigtail - No Connector       |       |
| Coax Cable               | Jacketed Conformable         |       |
| Cable Type               | 085CJ                        |       |
| Cable Inner Conductor    | SPCW                         |       |
| Dielectric               | PTFE                         |       |
| Shield                   | 1. Tinned Cu/Sn Braid        |       |
| Jacket                   | FEP                          |       |
| Coax Diameter            | 0.102                        |       |
| Minimum Bend Radius      | 0.125                        |       |
| Length                   | 5.0                          |       |
| Operating Temperature    | -55.0 to 200.0 °C            |       |
| RoHS Compliance          | Yes                          |       |

**Drawing**

SMA Female to Pigtail (no connector) cable assembly using 085CJ Jacketed  
Conformable Coax, 5 inches long, Operating to 6 GHz.



**Product Notes**