


# P1CA-SAMSAM-141CC-72

SMA Male to SMA Male cable assembly using 141CC Conformable Coax, 72 inches long, Operating to 26.5 GHz.

#### **Product Features**

P1CA-SAMSAM-141CC-72 is an RF Cable that is part of P1dB's YouForm™ conformable cable assembly series. It is a 72 inch SMA Male to SMA Male Conformable cable assembly that utilizes 141CC conformable coax with a diameter of 0.141 inches. The RF cable assembly operates to 26.5 GHz with a max VSWR of 1.35:1. YouForm™ cables are conformable and jacketed conformable versions 085 and 141 semi-rigid coax cables and meet RG402 and RG405 dimensional and electrical specifications. YouForm™ cable assemblies can operate up to 26.5 GHz, depending on the configuration. The advantage of YouForm™ conformable cables over semi-rigid are their ability to be formed by hand multiple times, while semi-rigid cables can be formed only once with special bending tools.



### **Electrical Specification: T**<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		26.5	
VSWR	DC to 1.0	1:			1.1	
	1.0 to 5.0				1.1	
	5.0 to 10.0				1.15	
	10.0 to 26.5				1.35	
Insertion Loss	DC to 1.0	dB/ft.			0.12	
	1.0 to 5.0				0.31	
	5.0 to 10.0				0.45	
	10.0 to 26.5				0.65	
Velocity Of Propagation		%		70.0		

#### **Mechanical And Environmental Specifications:**

Parameter	Description	Notes	
Connector 1	SMA Male		
Connector 1 Coupling Nut	Passivated Stainless Steel		
Connector 1 Body	Gold Plated Brass		
Connector 1 Contact	Gold Plated Brass		
Connector 2	SMA Male		
Connector 2 Coupling Nut	Passivated Stainless Steel		
Connector 2 Body	Gold Plated Brass		
Connector 2 Contact	Gold Plated Brass		
Coax Cable	Conformable		
Cable Type	141CC		
Cable Inner Conductor	SPCW		
Dielectric	PTFE		
Shield	1. Tinned Cu/Sn Braid		
Jacket	FEP		
Coax Diameter	0.141		

P1dB, Inc.

188 Martinvale Lane, San Jose, CA 95119

+1(408)613-4857




# P1CA-SAMSAM-141CC-72

SMA Male to SMA Male cable assembly using 141CC Conformable Coax, 72 inches long, Operating to 26.5 GHz.

Parameter	Description	Notes
Minimum Bend Radius	0.38	
Length	72.0	
Operating Temprature	-85.0 to 200.0 °C	
RoHS Compliance	Yes	

## **Drawing**

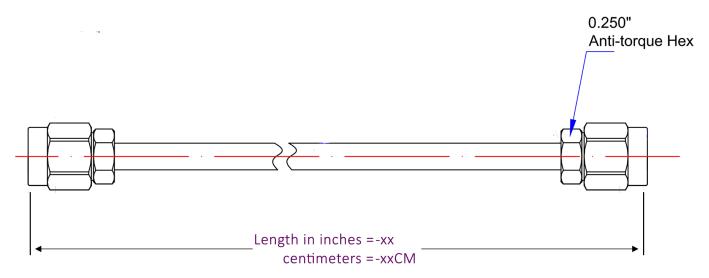

### **Product Notes**