

# P1CA-SAMSAMRA-RG58-36

SMA Male to SMA Male Right Angle cable using RG-58 RG Type Flex Coax, 36 inches long, and Operating to 6 GHz.

#### **Product Features**

P1CA-SAMSAMRA-RG58-36 is a cable that is part of P1dB's RG series flex cable assemblies. It is a 36 inch SMA Male to SMA Male Right Angle cable assembly that utilizes RG-58 RG Type Flex coax, which is 0.195 inches in diameter. This RG Type Flex cable operates to 6 GHz with a max VSWR of 1.35:1. P1dB's RG Type Flex cable assemblies are general purpose commercial grade cables that meet dimensional and electrical specifications of QPL cables. RG Type Flex cables can operate up to 6 GHz, depending on the installed connectors. The advantage of RG type commercial cables over QPL cables is their lower cost, since they do not go through the stringent environmental, mechanical and certification testing required for military grade, QPL equivalents.



## **Electrical Specification: T**<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		6.0	
VSWR	DC to 0.1	1:			1.2	
	0.1 to 0.4				1.25	
	0.4 to 1.0				1.3	
	1.0 to 5.0				1.35	
Insertion Loss	DC to 0.1	dB/ft.			0.05	
	0.1 to 0.4				0.1	
	0.4 to 1.0				0.18	
	1.0 to 5.0				0.6	
Velocity Of Propagation		%		65.9		

#### **Mechanical And Environmental Specifications:**

Parameter Parame	Description	Notes	
Connector 1	SMA Male		
Connector 1 Coupling Nut	Gold Plated Brass		
Connector 1 Body	Gold Plated Brass		
Connector 1 Contact	Gold Plated Brass		
Connector 2	SMA Male Right Angle		
Connector 2 Coupling Nut	Tin-Zinc-Copper-Alloy Plated Brass		
Connector 2 Body	Tin-Zinc-Copper-Alloy Plated Brass		
Connector 2 Contact	Gold Plated Brass		
Coax Cable	RG Type Flex		
Cable Type	RG-58		
Cable Inner Conductor	TPC 19/.0072		
Dielectric	PE		
Shield	1. TPC Briad		
Jacket	PVC		
Coax Diameter	0.195		

P1dB, Inc.

188 Martinvale Lane, San Jose, CA 95119

+1(408)613-4857




# P1CA-SAMSAMRA-RG58-36

SMA Male to SMA Male Right Angle cable using RG-58 RG Type Flex Coax, 36 inches long, and Operating to 6 GHz.

Parameter	Description	Notes
Minimum Bend Radius	1.0	
Length	36.0	
Operating Temprature	-40.0 to 80.0 °C	
RoHS Compliance	Yes	

# **Drawing**

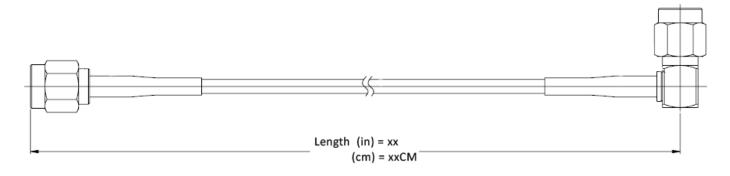

### **Product Notes**