


SMA male to SMP female, SS085 flex cable, 6 inch. Phase matched +/- 3 degrees at 10 GHz. Supplied as a phase matched pair (2 cables). Price is per cable. Test data supplied.

Product Features

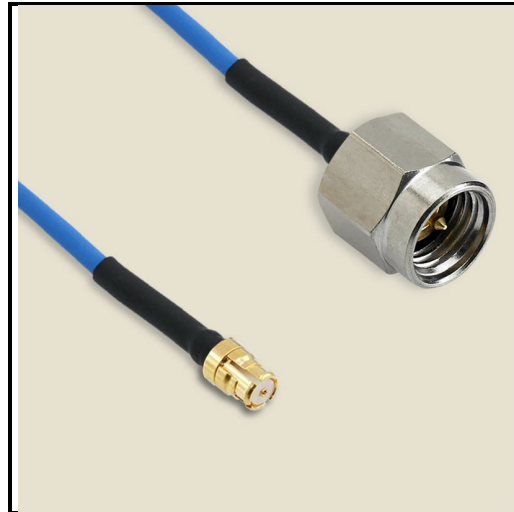

Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		18.0	
VSWR	DC to 1.0	1:			1.2	
	1.0 to 5.0				1.25	
	5.0 to 10.0				1.3	
	10.0 to 18.0				1.35	
Insertion Loss	DC to 1.0	dB/ft.			0.23	
	1.0 to 5.0				0.52	
	5.0 to 10.0				0.8	
	10.0 to 18.0				1.1	
Velocity Of Propagation		%		70.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Male	
Connector 1 Coupling Nut	Passivated Stainless Steel	
Connector 1 Body	Passivated Stainless Steel	
Connector 1 Contact	Gold Plated Brass	
Connector 2	SMP Female	
Connector 2 Coupling Nut	None	
Connector 2 Body	Gold Plated Beryllium Copper	
Connector 2 Contact	Gold Plated Beryllium Copper	
Coax Cable	High Performance	

SMA male to SMP female, SS085 flex cable, 6 inch. Phase matched +/- 3 degrees at 10 GHz. Supplied as a phase matched pair (2 cables). Price is per cable. Test data supplied.

Parameter	Description	Notes
Cable Type	SS085	
Cable Inner Conductor	SPC	
Dielectric	PTFE	
Shield	1. SPC Ribbon	
	2. SPC Braid	
Jacket	FEP	
Coax Diameter	0.104	
Minimum Bend Radius	0.25	
Length	6.0	
Operating Temperature	-55.0 to 200.0 °C	
RoHS Compliance	No	

Product Notes