


P1CA-SAMSPFRA-SS085-60

SMA Male to SMP Female Right Angle RF flex cable using SS085 High Performance Coax, 60 inch. Frequency DC to 18 GHz.

Product Features

P1CA-SAMSPFRA-SS085-60 is an RF Flex Cable that is part of P1dB's SS085 series, high performance cable assemblies. It is a 60 inch SMA Male to SMP Female Right Angle cable assembly that utilizes SS085 High Performance coax, which is 0.104 inches in diameter. The SS085 high performance flex cable operates to 18 GHz with a max VSWR of 1.35:1. P1dB's SS085 cable assemblies are high performance RF cables that are dimensionally equivalent to RG405 semi-rigid and 085 conformable coax cables, and have similar electrical specifications to RG405 coax. SS085 RF flex cables can operate up to 50 GHz, depending on the installed connectors. The advantage of SS085 test cables over other test cables are their cost-effective design that still offer good phase and amplitude stability for general purpose test systems.

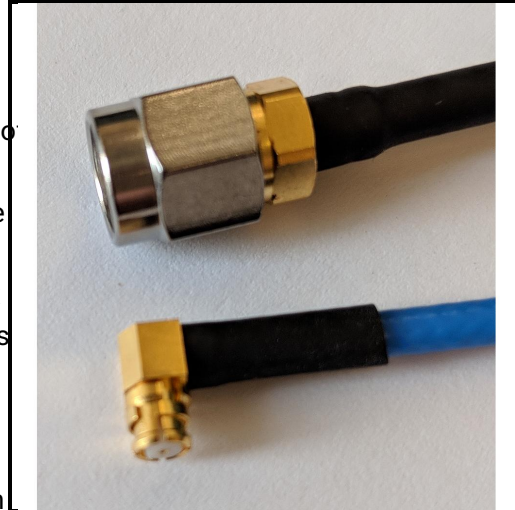

Electrical Specification: T_{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		18.0	
VSWR	DC to 1.0	1:			1.2	
	1.0 to 5.0				1.25	
	5.0 to 10.0				1.3	
	10.0 to 18.0				1.35	
Insertion Loss	DC to 1.0	dB/ft.			0.23	
	1.0 to 5.0				0.52	
	5.0 to 10.0				0.8	
	10.0 to 18.0				1.1	
Velocity Of Propagation		%		70.0		

Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	SMA Male	
Connector 2	SMP Female Right Angle	



P1CA-SAMSPFRA-SS085-60

SMA Male to SMP Female Right Angle RF flex cable using SS085 High Performance
Coax, 60 inch. Frequency DC to 18 GHz.



Parameter	Description	Notes
Length	60.0	
RoHS Compliance	Yes	

Product Notes