
P1CO-SAF2-F012

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with Socket for .012 Pin. Frequency DC to 27 GHz. Max VSWR 1.15 up to 27 GHz.

Product Features

P1CO-SAF2-F012 is a 50 Ohm RF connector, SMA jack (female) field replaceable design. This is a 2 hole flange mount SMA that mates with a 0.012 inch diamter pin.


Frequency is DC to 27 GHz.

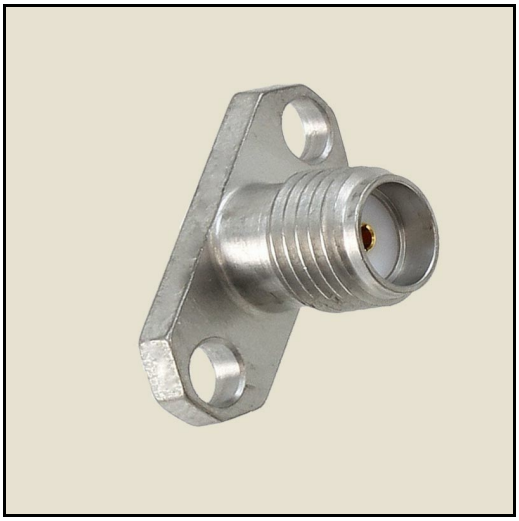

Mechanical And Environmental Specifications:

Parameter	Description	Notes
RoHS Compliance	Yes	

Drawing

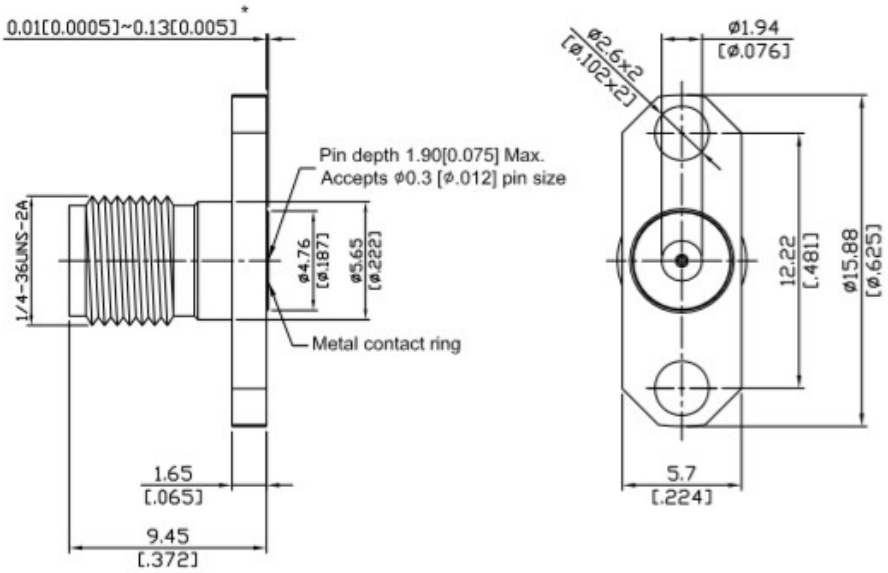

Operating Temp: -65°C/+165°C
VSWR 1.15 : 1 Up To 27GHz
*360° Raised Metal Contact Ring

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com

P1CO-SAF2-F012

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with Socket for .012 Pin. Frequency DC to 27 GHz. Max VSWR 1.15 up to 27 GHz.

Product Notes

P1dB, Inc. 188 Martinvale Lane, San Jose, CA 95119 +1(408)613-4857

sales@p1dB.com