

# P1CO-SAF2-FE012-27G

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with EMI gasket.  
Frequency DC to 27 GHz.

## Product Features



## Electrical Specification: T<sub>Ambient</sub> = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		27.0	
Impedance				50.0		


## Mechanical And Environmental Specifications:

Parameter	Description	Notes
RoHS Compliance	Yes	

## Drawing

# P1CO-SAF2-FE012-27G

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with EMI gasket.  
 Frequency DC to 27 GHz.

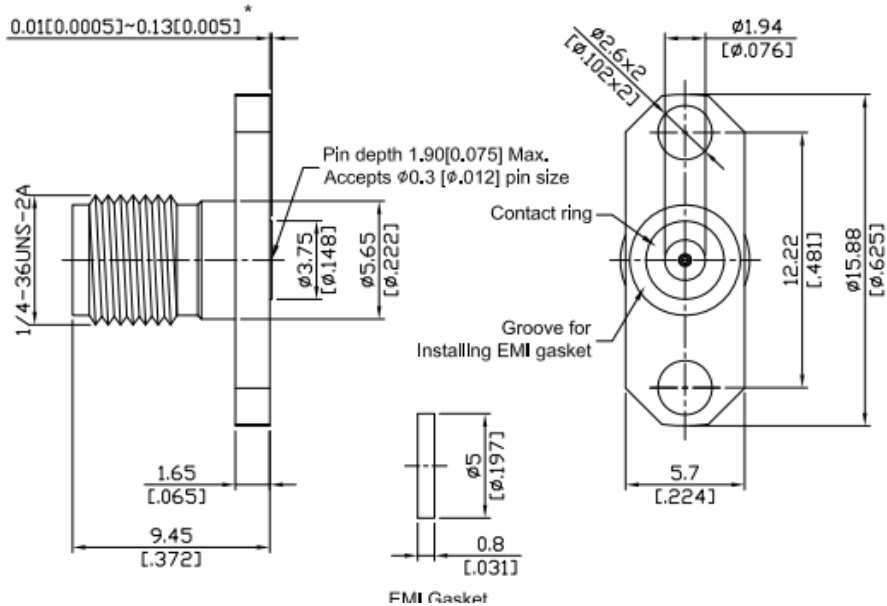

## Graph

Parts	Material	Plating ( Micro-inch )
Body	Stainless Steel	Passivated
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Ring	Stainless Steel	Passivated
EMI Gasket	Conductive Silicone Elastomers	

## Product Notes