

P1CO-SAF2-FE012-27G

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with EMI gasket.
Frequency DC to 27 GHz.

Product Features



Electrical Specification: T_{Ambient} = 25° C

| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------------|-----------------|-------|-----|---------|------|-------|
| Frequency Range | | GHz | DC | | 27.0 | |
| Impedance | | | | 50.0 | | |


Mechanical And Environmental Specifications:

| Parameter | Description | Notes |
|-----------------|-------------|-------|
| RoHS Compliance | Yes | |

Drawing

P1CO-SAF2-FE012-27G

Connector, SMA Female, 2-Hole Panel Mount, Field Replaceable with EMI gasket.
 Frequency DC to 27 GHz.

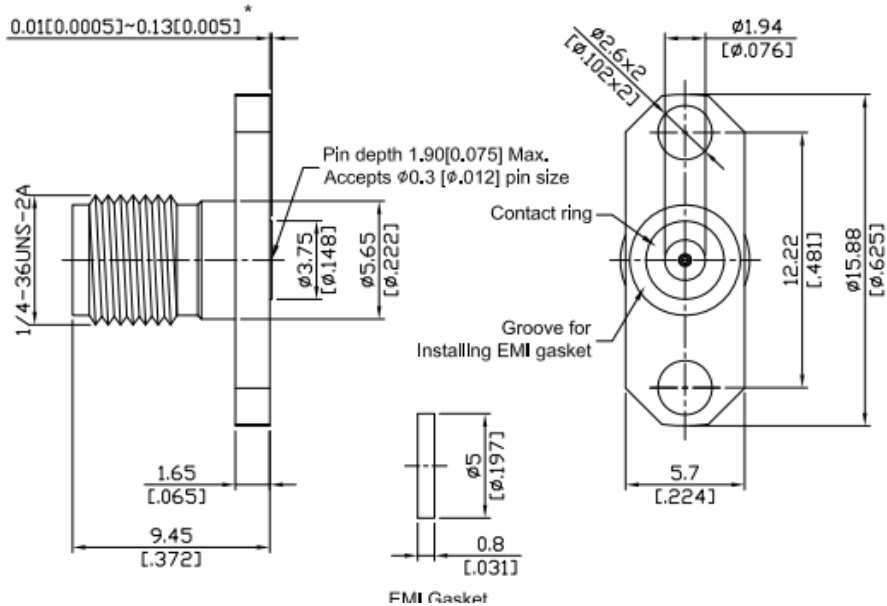

Graph

| Parts | Material | Plating (Micro-inch) |
|--------------|--------------------------------|---|
| Body | Stainless Steel | Passivated |
| Insulator | Teflon | |
| Contact Pin | Beryllium Copper | Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20 |
| Contact Ring | Stainless Steel | Passivated |
| EMI Gasket | Conductive Silicone Elastomers | |

Product Notes