


Product Features

P1CO-SAF4-E059P012 is a 50 Ohm RF connector. It's an SMA Female 4-hole flange mount design with an extended dielectric and .012 inch center contact. Passivated stainless steel body with epoxy captivated center contact.

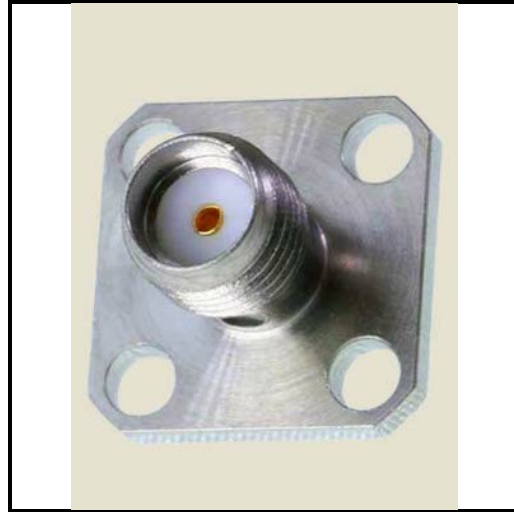

Electrical Specification: T_{Ambient} = 25° C


| Parameter | Frequency Range | Units | Min | Typical | Max | Notes |
|-----------|-----------------|-------|-----|---------|-----|-------|
| Impedance | | | | 50.0 | | |

Mechanical And Environmental Specifications:

| Parameter | Description | Notes |
|-----------------|-------------|-------|
| RoHS Compliance | Yes | |

Drawing

EPOXY CAPTIVATION

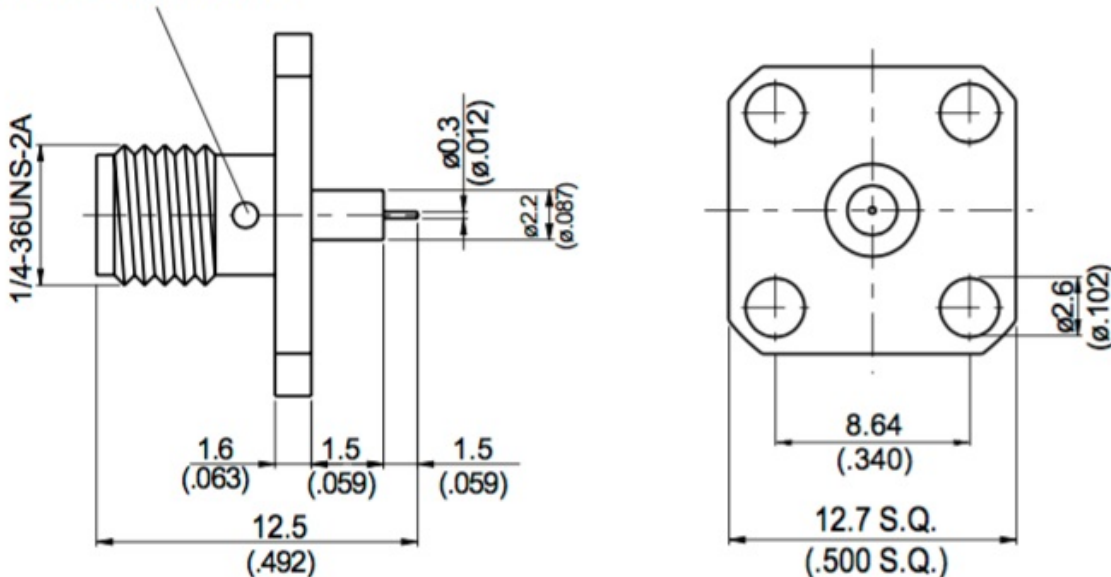

Graph

| Parts | Material | Plating (Micro-inch) |
|-------------|------------------|---------------------------------------|
| Contact Pin | Beryllium Copper | Gold 20 Over Nickel 50 Over Copper 50 |
| Insulator | Teflon | |
| Body | Stainless | Passivated |

Product Notes