

P1AT-18MF-67G2W-10

RF Attenuator, 1.85mm Male to 1.85mm Female, 10 dB, 2 Watt. Frequency DC to 67 GHz. VSWR 1.30 max.

Product Features

P1AT-18MF-67G2W-6 is a 50 Ohm coaxial attenuator. The connectors are 1.8mm male to 1.8mm female. Frequency range is DC to 67 GHz with a max VSWR 1.30.

Attenuation is 10 dB. Power handling is 2 Watts maximum. The attenuator body is passivated stainless steel.



Electrical Specification: T _{Ambient} = 25° C

Parameter	Frequency Range	Units	Min	Typical	Max	Notes
Frequency Range		GHz	DC		67	


Mechanical And Environmental Specifications:

Parameter	Description	Notes
Connector 1	1.85mm Male	
Connector 2	1.85mm Female	
RoHS Compliance	Yes	

Drawing

P1AT-18MF-67G2W-10

RF Attenuator, 1.85mm Male to 1.85mm Female, 10 dB, 2 Watt. Frequency DC to 67 GHz. VSWR 1.30 max.

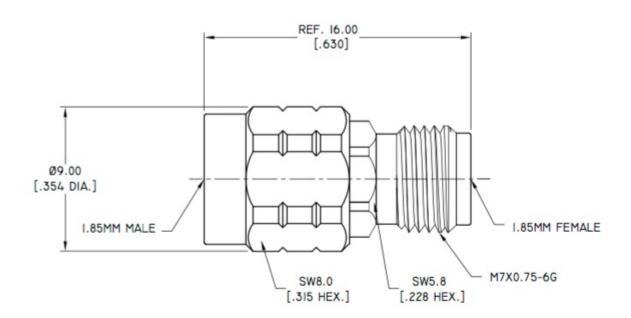

Product Notes

Temp range is -55 to +125 deg C.

Attenuation accuracy is 1 dB.