

# P1-SAMSAM-141CJ-108

SMA Male to SMA Male cable assembly using 141CJ Conformable Coax, 108 inches long, Operating to 18 GHz.


## Product Features

RF cable assembly, 50 OHm. SMA male to SMA male.

Coax cable is hand formable 141CJ.

Assembly length is 108 inch.

Frequency is DC to 18 GHz.

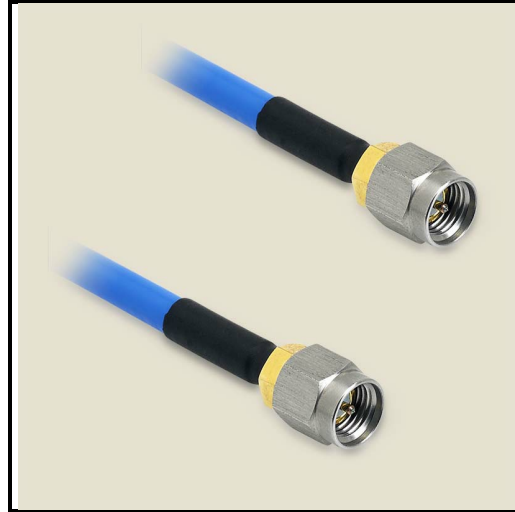

## Electrical Specification: $T_{\text{Ambient}} = 25^{\circ}\text{C}$

| Parameter               | Frequency Range | Units  | Min | Typical | Max  | Notes |
|-------------------------|-----------------|--------|-----|---------|------|-------|
| Frequency Range         |                 | GHz    | DC  |         | 18.0 |       |
| VSWR                    | DC to 1.0       | 1:     |     |         | 1.25 |       |
|                         | 1.0 to 5.0      |        |     |         | 1.3  |       |
|                         | 5.0 to 10.0     |        |     |         | 1.32 |       |
|                         | 10.0 to 18.0    |        |     |         | 1.35 |       |
| Insertion Loss          | DC to 1.0       | dB/ft. |     |         | 0.12 |       |
|                         | 1.0 to 5.0      |        |     |         | 0.31 |       |
|                         | 5.0 to 10.0     |        |     |         | 0.45 |       |
|                         | 10.0 to 18.0    |        |     |         | 0.65 |       |
| Velocity Of Propagation |                 | %      |     | 70.0    |      |       |

## Mechanical And Environmental Specifications:

| Parameter                | Description                | Notes |
|--------------------------|----------------------------|-------|
| Connector 1              | SMA Male                   |       |
| Connector 1 Coupling Nut | Passivated Stainless Steel |       |
| Connector 1 Body         | Gold Plated Brass          |       |
| Connector 1 Contact      | Gold Plated Brass          |       |
| Connector 2              | SMA Male                   |       |

# P1-SAMSAM-141CJ-108

SMA Male to SMA Male cable assembly using 141CJ Conformable Coax, 108 inches long, Operating to 18 GHz.

| Parameter                | Description                | Notes |
|--------------------------|----------------------------|-------|
| Connector 2 Coupling Nut | Passivated Stainless Steel |       |
| Connector 2 Body         | Gold Plated Brass          |       |
| Connector 2 Contact      | Gold Plated Brass          |       |
| Coax Cable               | Conformable                |       |
| Cable Type               | 141CJ                      |       |
| Cable Inner Conductor    | SPCW                       |       |
| Dielectric               | PTFE                       |       |
| Shield                   | 1. Tinned Cu/Sn Braid      |       |
| Jacket                   | FEP                        |       |
| Coax Diameter            | 0.168                      |       |
| Minimum Bend Radius      | 0.38                       |       |
| Length                   | 108.0                      |       |
| Operating Temperature    | -85.0 to 200.0 °C          |       |
| RoHS Compliance          | Yes                        |       |

## Product Notes